SPICA

Zone Touch

Zone Touch is a family of feature-rich and cost-effective time clocks supporting most major card and card replacement technologies. In addition to a standard compact model, there is one with fingerprint reader and also one with four hard keys. Access control features are available through optional Zone Door I/O box.

TIME SPACE

allhours

With its compact size and clean design, Zone Touch is a simple, elegant and cost-effective solution for employee time recording. A built-in card reader supports most major RFID card technologies. If support for a more exotic technology is required, Zone Touch allows connecting an external reader as well.

Zone Touch connects to the system directly through its Ethernet port. Basic access control and alarm management functionality for one door are provided by adding a Zone Door I/O box.

Its durable touch screen makes Zone Touch tough enough for light industrial environments.

Two additional models are available in IP65 rated housing. The FP model adds a fingerprint reader by biometric technology leader Idemia. The KB model adds four hard keys and support for various legacy card formats.

Built-in RFID card reader supports most major card technologies.

Support for HID Mobile Access™ allows smartphone use instead of cards.

Zone Touch

Compact version for standard applications

- Programmable clocking events
- Data synchronisation for autonomous offline operation
- Automatic online-offline switching
- Deep integration with Time&Space and All Hours
- Smartphone use with HID Moble Access™

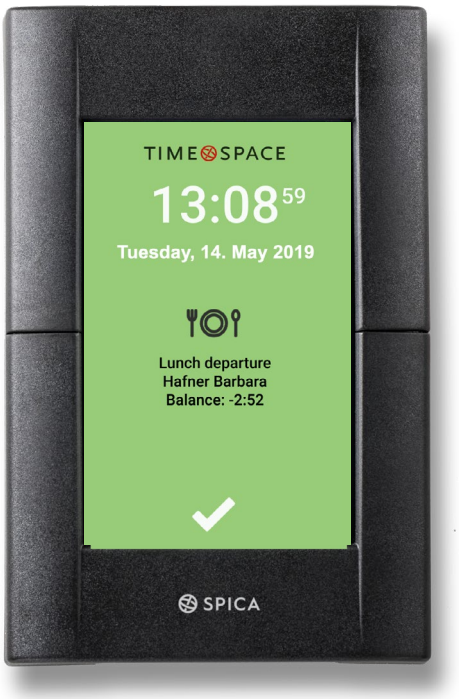

Zone Touch FP

Biometric version

- All features of the standard version
- High-quality fingerprint sensor by Idemia
- IP65 housing

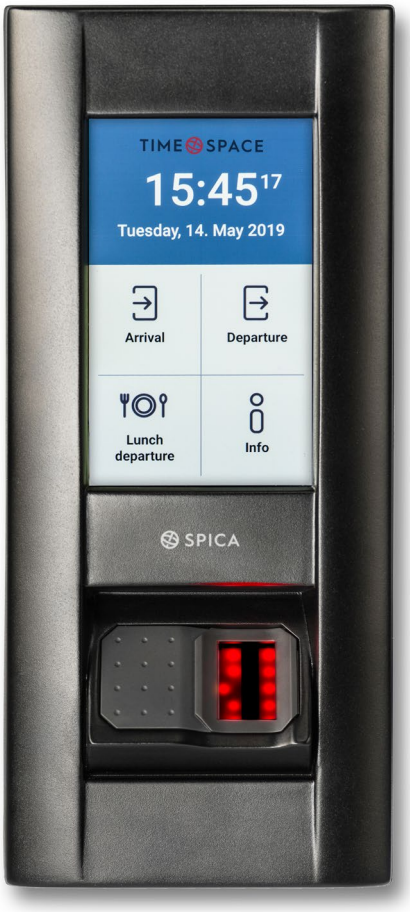

Zone Touch KB

Industrial version with four hard keys

- All features of the standard version
- Four programmable hard keys for rough fingers
- IP65 housing
- Support for legacy card technologies (125 kHz)

Device	Zone Touch	Zone Touch FP	Zone Touch KB
External dimensions (mm)	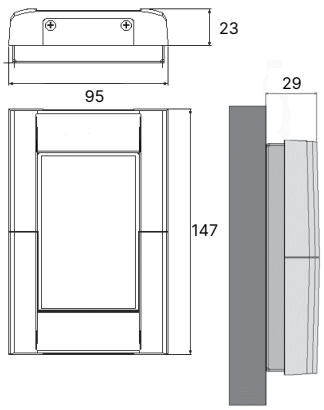	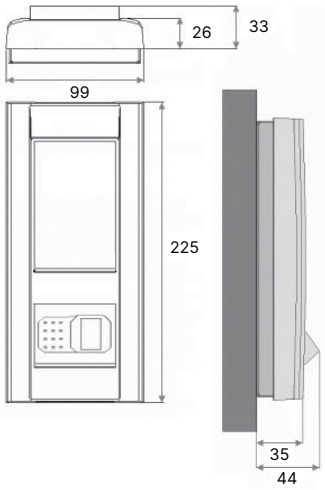	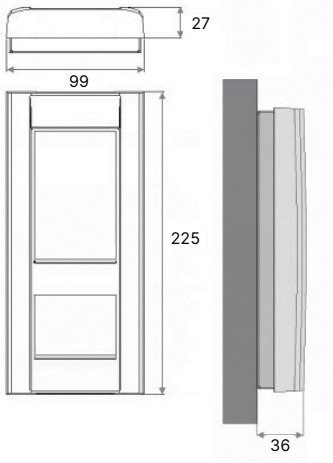
Power supply	PoE (Power over Ethernet) or external 12 V DC, 500 mA		
Environment	Operating temperature 0 ºC to +50 ºC, Storage temperature -20 ºC to +70 ºC Humidity: 10 % to 90 % (non-condensing)		
Environmental protection		IP65	
Communication interface	Ethernet 10/100 for host communications CAN bus for connecting Zone Door unit Wiegand input for connecting external readers Wiegand output RS485		
Memory and storage	256 MB RAM 2 GB MicroSD card		
Display	4.3 inch 800×480 pixel display with capacitive touch screen		
Beeper	For audible feedback		
Reader type	HID® iCLASS SE® Reader Module, mobile ready		
Standard card formats	HID® iCLASS SE®, HID® iCLASS Seos® in MIFARE® DESFire® EV1, EV2, EV3 SE, ISO14443A/B CSN, ISO15693 CSN		
Legacy card formats			EM410x, Indala, HID Prox II
Smartphone support	HID Mobile Access™		
Keyboard			Membrane, programmable, 4 keys
Biometric reader		Idemia fingerprint sensor	
Biometric templates		Morpho PKLite	
Certification	CE		
Support period*	5 years from product discontinuation		

* Includes security/firmware updates.

Optional door control with Zone Door I/O box

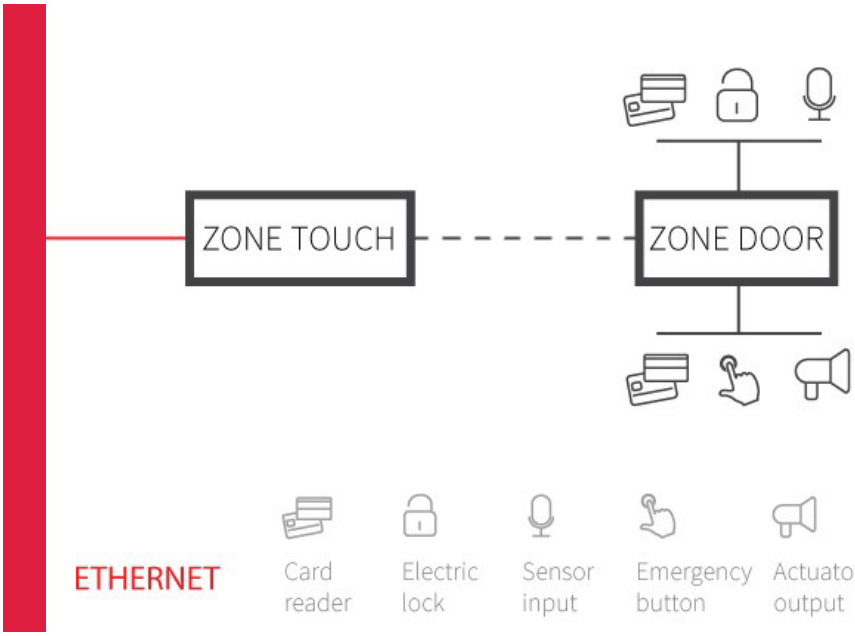

For more about Zone Door I/O device see separate brochure.

PLATINUM HID Physical Access

TIME SPACE

allhours

Špica International d.o.o., Pot k sejmiscu 33, SI-1231 Ljubljana, Slovenia • www.spica.com • www.timeandspace.eu • T: +386 1 5 68 08 00 • info@spica.com
© Špica International, October 2026