SPICA

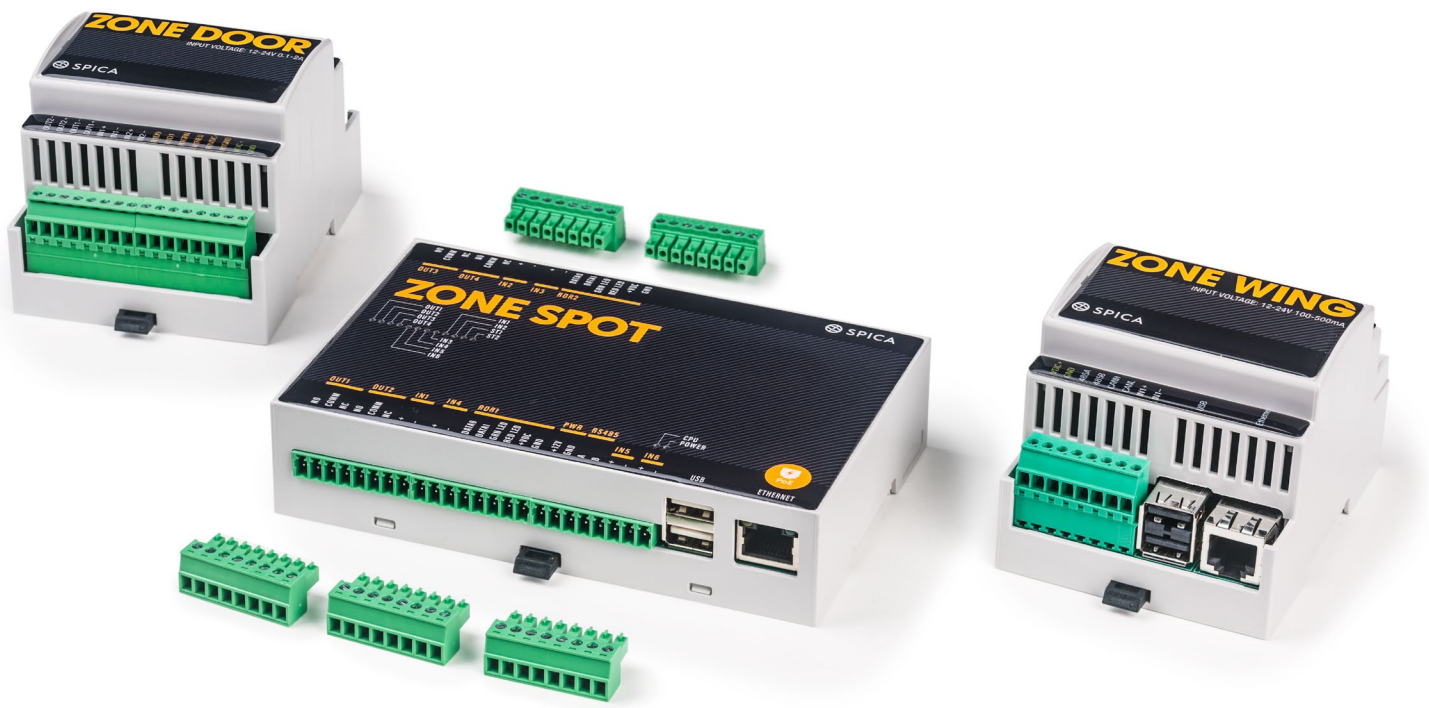

Zone Access

Zone Access family of controllers have been designed as building blocks for highly-scalable and flexible access control architecture. With just three devices to choose from, Zone Access range provides the optimal solution to the widest range of access control requirements.

Zone Access access control architecture requires just two core components: Zone Wing, an intelligent network controller, and Zone Door, a smart door control device. By strategically dividing the control from the I/O function, this architecture offers new levels of security, flexibility and scalability, allowing the optimum balance of control, ease-of-installation and ‘cost-per-door’. For less structured topologies, by joining one Zone Wing and one Zone Door device under the hood, Zone Spot provides powerful all-in-one access point solution.

ZONE WING

Zone Wing is an intelligent control device and network communication hub. Running on a Linux-based platform, it provides the storage, processing power and programmability needed for standard cryptography based security. Zone Wing directly manages and executes user access rights for multiple Zone Door controllers. It also relays all messages, alarm signals and logs between the host and the points of access. It manages the resident profile database and event logs, assuring maximum autonomy should the system go offline.

Two USB ports are available and are intended for configuration purposes or for connecting a communication dongle to enable access control over BLE. The primary host connectivity is provided via an Ethernet port. Zone Door I/O devices are connected using an industry-standard CAN bus.

Zone Wing is an intelligent access controller intended for driving up to 16 Zone Door devices, which normally means the doors on a corridor, floor or a wing. Hence the name.

ZONE DOOR

Zone Door is a smart I/O device offering maximum flexibility of input and output configurations at the point-of-access level. This includes the interface for card and biometric readers (Wiegand and RS485), door strike relays, alarms and other input and output ports. Flexible I/O design allows several different configurations of door strikes, push buttons and alarms. Up to 2 Wiegand readers are supported as default, RS485 reader support capability is optional.

Zone Door can be also used with Zone Touch time recording terminal for adding basic access control capability.

Zone Door is an innovative, low-cost point-of-access device for controlling door hardware and door-related peripherals.

ZONE SPOT

Zone Spot is an intelligent access control solution for single, dual or double-door access points. We can think of it as a combination of a Zone Wing and one Zone Door packed into a single box. The only difference is that Zone Spot cannot drive additional Zone Door devices.

Zone Spot can be powered either by using an external power supply or using PoE (Power-over-Ethernet).

Zone Spot is an intelligent all-in-one access controller with built-in door I/O with enough capability for comfortably covering any access control point or spot. Hence the name.

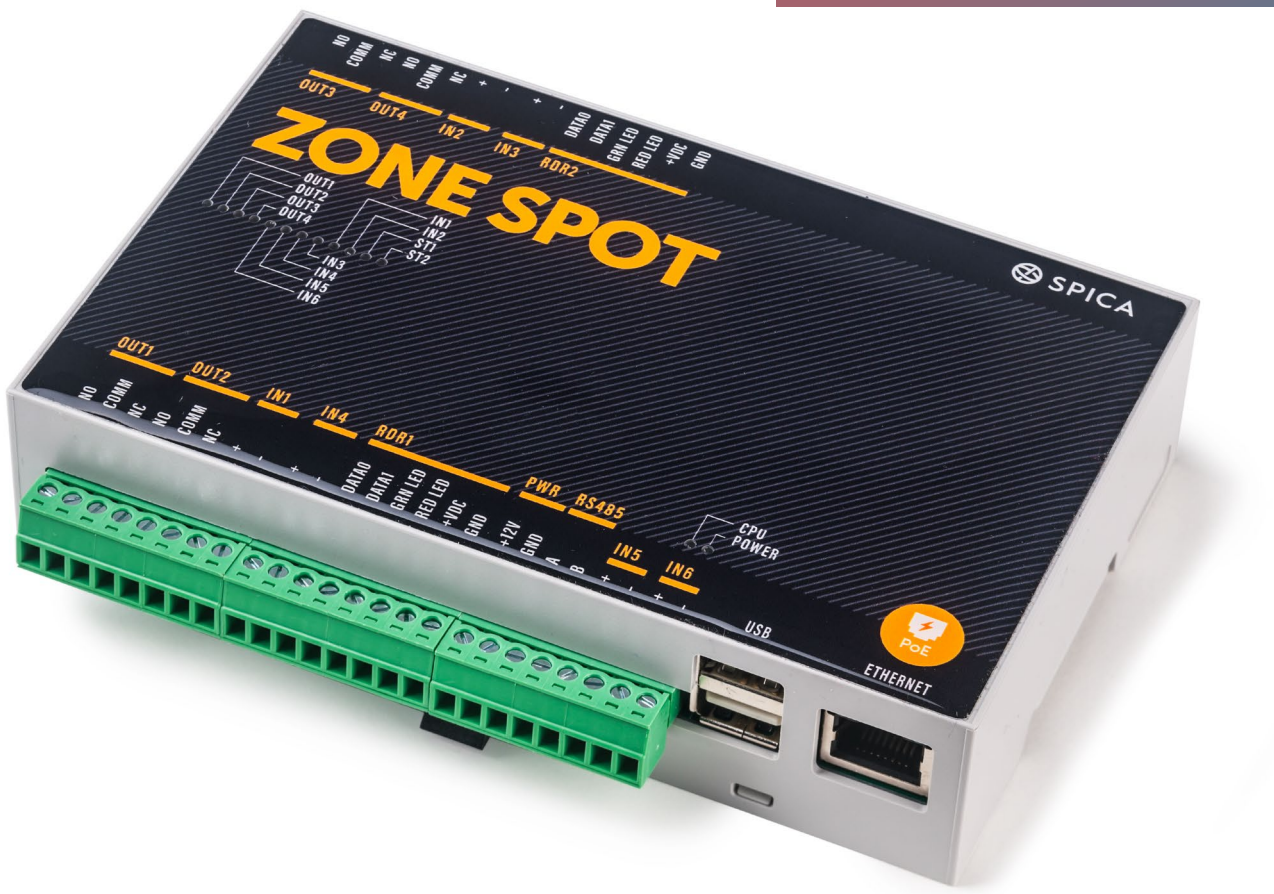

DIN rail mounting

All three devices are mounted on a standard 35mm DIN rail (EN 50022), offering the widest choice of housing and power supply solutions, including PoE (Power-over-Ethernet). By using the DIN rail standard and due to its compact dimensions, Zone Wings and Zone Doors can often be mounted in existing control panels. Detachable, snap-on connector blocks provide maximum installation convenience.

Product Specifications

Zone Wing

Dimensions	72 × 62 × 91 mm
Mounting	Din rail 35 mm – EN50022
Power Supply	12 V DC, 2 A max
Support period*	4 W
Environment	Operating temperature: 0 °C to +50 °C, Storage temperature: -20 °C to +70 °C, Humidity: 10 % to 90 % (non-condensing)
Communication Interfaces	Ethernet TLS 1.2, RS485 (2x OSDP V2 secure) CAN (isolated) 2 x USB
Memory and Storage	128MB RAM and 2GB MicroSD card, optional expansion with USB stick
Supported Wiegand formats	26 bit H10301, 27 bit Indala, 37 bit H10304, 35 bit HID Corporate. Additionally: 32 and 56 bit (CSN)
Certification	CE, FCC, EN 60839-11-1
Support period*	5 years from product discontinuation

Zone Door

Dimensions	72 × 62 × 91 mm
Mounting	Din rail 35 mm – EN50022
Power Supply	12 V DC, 2 A max
Power Consumption	1.5 W
Environment	Operating temperature: 0 °C to +50 °C, Storage temperature: -20 °C to +70 °C, Humidity: 10 % to 90 % (non-condensing)
Communication interface	CAN (isolated), RS485
Reader options	2 x Wiegand or Data Clock (ABA Track II)
Inputs	Standard: IN1, IN2: active, 5V sourced from device Custom: OUT1, OUT2, OUT3, OUT4: passive, opto-isolated or active 12 V R1D0, R1D1, R2D0, R2D1: active 5V
Outputs	Standard: OUT1, OUT2: relay type, passive or active 12 V, 1 A max OUT3, OUT4: as OUT1 in OUT2 + configurable NO/NC, 1 A max Custom: R1RED, R1GRN, R2RED, R2GRN: open collector, 250 mA max
Extra IO capabilities	Output ports jumper configurable as extra inputs. Reader ports configurable as extra inputs and outputs.
Certification	CE, FCC, EN 60839-11-1
Support period*	5 years from product discontinuation

Zone Spot

Dimensions	142 × 32 × 90 mm
Mounting	Din rail 35 mm – EN50022 or 2 screws, spaced 108 mm apart
Power Supply	PoE Class 0 or 12-24V DC PS2 LPS
Power Consumption	5 W (max without connected loads)
Environment	Operating temperature: 0 °C to +50 °C, Storage temperature: -20 °C to +70 °C, Humidity: 10 % to 90 % (non-condensing)
Communication interfaces	Ethernet TLS 1.2, 1 x RS485, 2 x USB
Reader options	2 x Wiegand or Data Clock (ABA Track II) interface 2x OSDP with secure channel interface BLE*
Inputs	IN1, IN2: Active, 3.3V sourced from device IN3, IN4: Passive, for external supply, opto-isolated IN5, IN6: Active, 12V sourced from device, opto-isolated
Outputs	OUT1, OUT2: Active relay, max 1A total** OUT3, OUT4: Passive relay, max 1A each *) 500mA on PoE
Supported Wiegand formats	26 bit H10301, 27 bit Indala, 37 bit H10304, 35 bit HID Corporate. Additionally: 32 and 56 bit (CSN)
Memory and Storage	128MB RAM and 2GB MicroSD card, optional expansion with USB stick
Certification	CE, FCC, EN 60839-11-1
Support period*	5 years from product discontinuation

* Includes security/firmware updates.
** Implemented using a USB BLE communication dongle (Asus USB-BT400).
Functionality is subject to support by the host access control system.

Connection Diagram example:

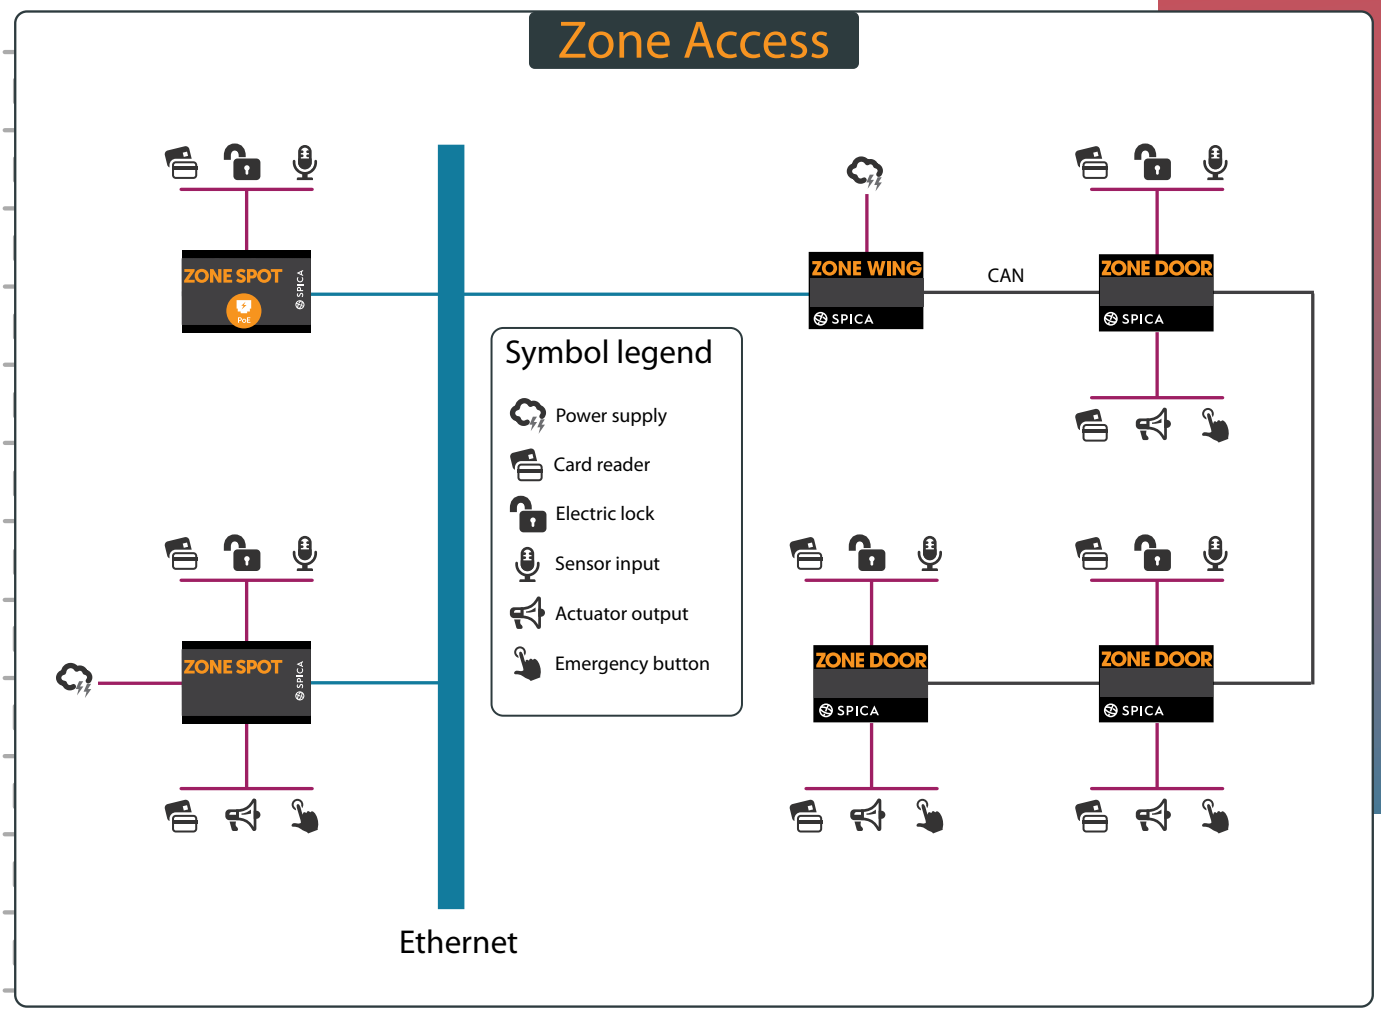

TIME SPACE

doorcloud

SPICA

TESTED WITH HID READERS

Spica International d.o.o., Pot k sejmiscu 33, SI-1231 Ljubljana, Slovenia • www.spica.com • T: +386 1 568 08 00 • info@spica.com
© Spica International, October 2026